
Shenzhen Turbosight Technology Ltd

TBS6903-X



Professional DVB-S2X Dual Tuner PCle Card

TBS6903-X is a **Professional** level digital satellite TV Tuner card with PCI Express interface. TBS6903 supports not only normal DVB-S2X/S2/DVB-S QPSK, 8PSK which is supported by normal satellite receivers, but also **CCM**, **ACM**, **VCM**, **16APSK**, **32APSK**, **Multiple Transport Stream**, **Multiple Generic Stream**, **Combined Single Generic &Single TS**, which most satellite receiving devices can't support. With use of dedicated TBS tools, those special streams can be captured. The two advanced DVB-S2/S tuners enable you to watch TV channel from one satellite transponder, while recording channels from different satellite transponders from another tuner at the same time.

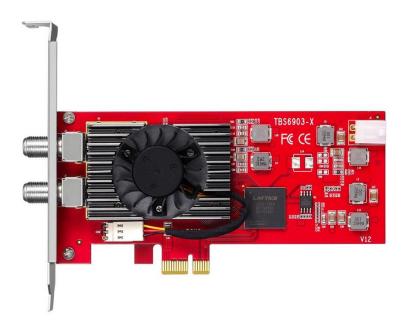

Main Features:

- DVB-S2X/S2 dual tuner
- Watch & record satellite TV/ radio programs on PC
- CCM, VCM, ACM and Multi Input Stream support
- Generic stream mode Support
- Blind scan support
- EPG (Electronic Program Guide) support
- Unicable/one cable compatible
- High-speed data download via satellite

DIGIAL TV TUNER FOR DC & REST IDTV SOLUTION

www.tbsdtv.com

sales@tbsdtv.com

Shenzhen Turbosight Technology Ltd

TBS6903-X



Applications:

- Data receiving
- IPTV streaming
- Media monitoring

Specification:

Model		TBS6903-X
Connection		PCI-express
		2x RF in
DVB-S/S2/S2X		
DVB-S/S2	QPSK	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
	8PSK	3/5, 2/3, 3/4, 5/6, 8/9, 9/10
	16APSK	2/3, 3/4, 4/5, 5/6, 8/9, 9/10
	32APSK	3/4, 4/5, 5/6, 8/9, 9/10
DVB-S2X	QPSK	1/4,1/3, 2/5 (S2-MODCODs)
		1/2, 3/5, 2/3, 3/4, 4/5, 5/6
		8/9, 9/10 (S2-MODCODs)
		11/45, 4/15, 14/45, 7/15 8/15, 32/45
	8PSK	3/5, 2/3, 3/4, 5/6, 8/9 (S2-MODCODs)
		7/15, 8/15, 26/45, 32/45
	16APSK	2/3, 3/4, 4/5, 5/6, 8/9 (S2-MODCODs)
		7/15, 8/15, 26/45, 3/5, 32/45
	32APSK	2/3, 32/45
	64APSK	32/45/L, 11/15, R/5E, 7/9
		R/60, 4/5, R/62, 5/6
	128APSK	3/4, 7/9, 29/45/L, 2/3/L
	256APSK	31/45/L, 32/45, 11/15/L, 3/4
VCM, VCM ,CCM		Yes
Power consump	tion	
Input/ Power:		12V/7~15W
temperature		0° ~60°
System Requirements		Windows XP / Vista/ 7/8/10, Linux
		Available PCI Express x1, x4, x8 or x16 slot
Package Contents		1* TBS6903-X
		1* Power cable